

DHP-7, DHB-7

1. CONNECT BATTERY



- Open the cover and snap the battery into the battery snap.

2. CONNECT TUBING

Screw the compression fitting in the 90° pipe elbow. Start with one turn past hand-tight. If there are leaks, tighten another ½ turn, and so on.

The JACO compression fitting will work on hard or soft tubing. Install as follows:

- Cut tubing squarely. (Remove burrs if hard tubing)
- Insert tubing through the nut all the way to the back.
- Turn the nut hand tight.

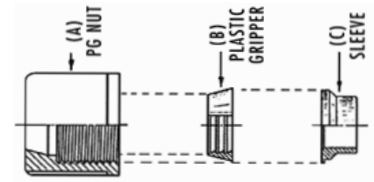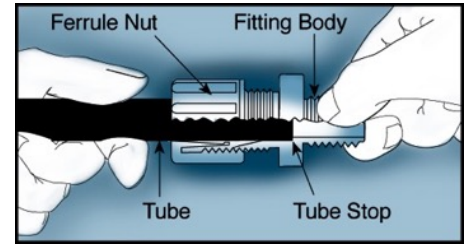

2. ADJUST DEPTH

- After screwing the drum plug into your drum, loosen the thumbscrew to slide the float pipe to desired depth.
- The fill pipe can also be loosened or removed altogether by loosening the setscrew to avoid tangling the fill tubing.

3. BATTERY REMINDER

Put a reminder on your PM program to replace the battery according to this chart. As a guide, a single lithium battery will provide 50 hours of continuous alarming and has a shelf life of 10 years. The volume level will decrease as the battery runs down which is a sign to change it.

ALARM FREQUENCY	REPLACEMENT TIME
Several times daily	Yearly
Once a day	two years
Weekly	4 years
Monthly	6 years
Never	10 years



4. OTHER POINTS

- The enclosure is rated to IP65 so can be safely sprayed down for cleaning.
- Material of the pipe, compression tubing fitting, float is polypropylene, the drum plug is polyethylene.
- The tip is removable so the float switch can be inspected/ cleaned.